

# Guarding Vision Mobile Client

## Quick Installation Guide

**Statement:**

The manual will be updated from time to time. If you use this manual have not encountered problems, please contact our technical support department or product vendor. The company has the right without prior notice.

Version: TTH2.0

# 一、 Install Guarding Vision APP

## 1.1 System Requirement

The following is the recommended system requirement for running the mobile client.

### System Requirement

For IOS: IOS 10 or later versions.

For Android: Android 5.0 or later versions.

### Memory

For IOS: 1 GB or above.

For Android: 2 GB or above.

## 1.2 Download and Install APP

### Steps

1. Open the Google Play& App Store
2. Search for “Guarding Vision”.
3. Tap **INSTALL APP** to download and install.


**Note:** Please scan the QR code below to download the Guarding Vision application for the subsequent operations.



Figure 1-1

## 1.3 Account Management

### Steps

1. Tap  to start the mobile client
2. Tap **Login** to enter the registration page. (Figure 1-2)

3. Select the country/region of your company.
4. Click **Register** to register for an account. (Figure 1-3)
5. Click **Agree**. (Figure 1-4)

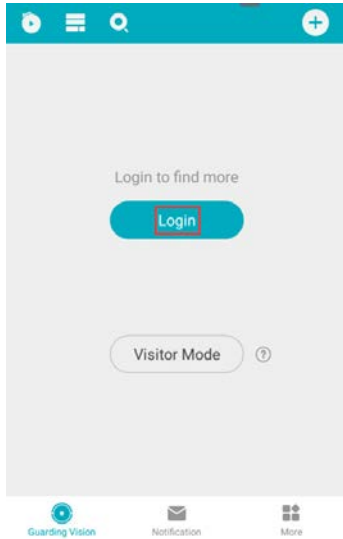


Figure 1-2

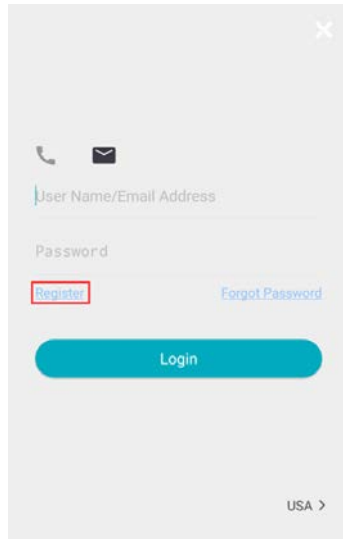


Figure 1-3

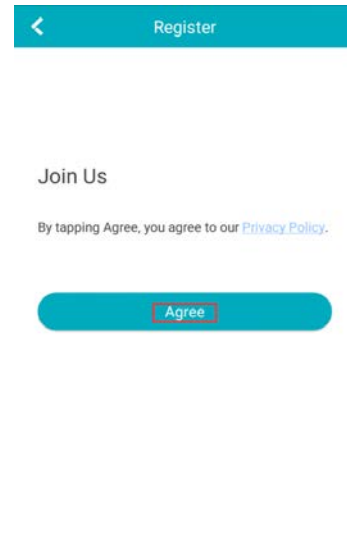


Figure 1-4

6. Enter an email address which will be bound with the Installer Admin account after registration.
7. Click **Get Security Code**. The server will send a **Security Code** to your e-mail. (Figure 1-5)
8. Input the Security Code and click **Next**. (Figure 1-6)
9. Enter your own **Password** and click **Finish**. (Figure 1-7)

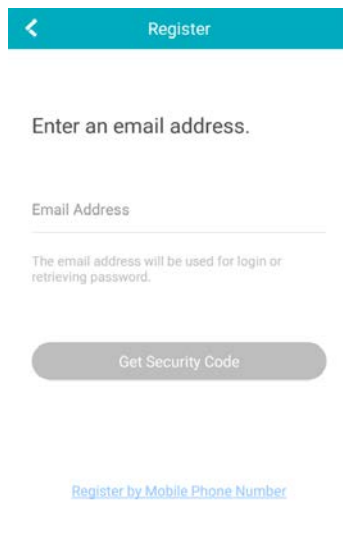


Figure 1-5



Figure 1-6

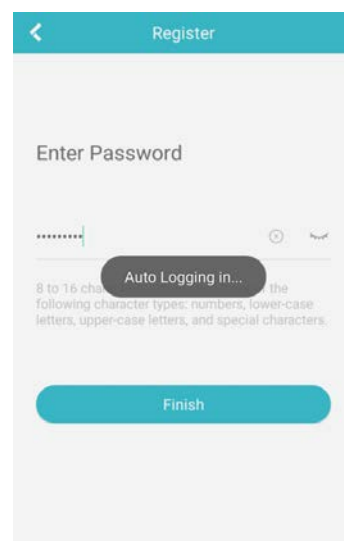


Figure 1-7

## 二、 Manage Device

Guarding Vision provides the mobile phone application and the service platform page ([www.guardingvision.com](http://www.guardingvision.com)) to access and manage your connected DVR, which enables you to get a convenient remote access to the surveillance system.

The Guarding Vision can be enabled via operation on SADP software, GUI and Web browser.

### 2.1 Network Setting


#### 2.1.1 Connect Offline Device to Network

When adding a device to the Mobile Client, if the device is offline, you should connect the device to a network first.

Network settings must be properly configured before you operate DVR over network.

#### Steps

1. Go to System > Network > TCP/IP.
2. In the General Settings interface, you can configure the following settings: NIC Type, IPv4 Address, IPv4 Gateway, MTU and DNS Server.
3. Save the settings.

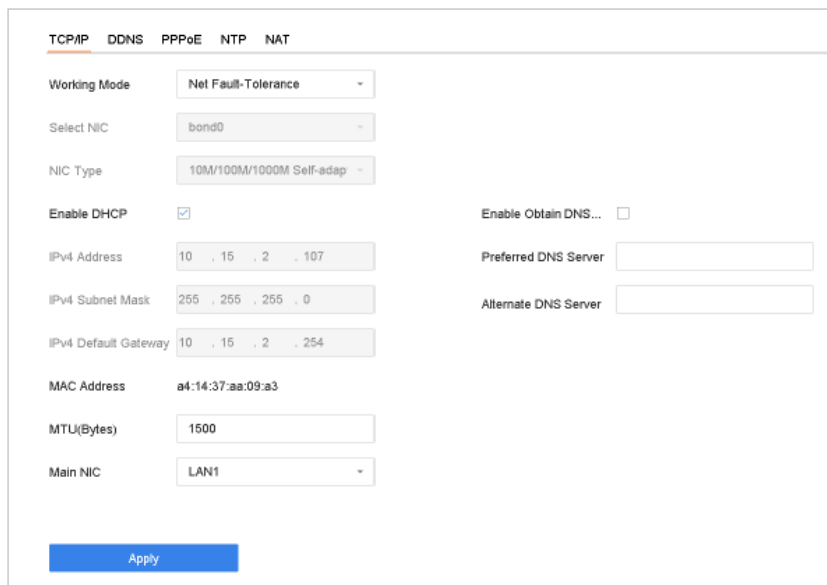

The screenshot displays the 'TCP/IP' configuration page. At the top, there are tabs for 'TCP/IP', 'DDNS', 'PPPoE', 'NTP', and 'NAT'. The 'TCP/IP' tab is selected. The settings are organized into two columns. The left column includes: 'Working Mode' (Net Fault-Tolerance), 'Select NIC' (bond0), 'NIC Type' (10M/100M/1000M Self-adap), 'Enable DHCP' (checked), 'IPv4 Address' (10.15.2.107), 'IPv4 Subnet Mask' (255.255.255.0), 'IPv4 Default Gateway' (10.15.2.254), 'MAC Address' (a4:14:37:aa:09:a3), 'MTU(Bytes)' (1500), and 'Main NIC' (LAN1). The right column includes: 'Enable Obtain DNS...' (unchecked), 'Preferred DNS Server' (empty field), and 'Alternate DNS Server' (empty field). A blue 'Apply' button is located at the bottom left of the form.

Figure 2-1 Network Settings

#### 2.1.2 Configuring Guarding Vision

Guarding Vision provides the mobile phone application and the service platform page ([www.guardingvision.com](http://www.guardingvision.com)) to access and manage your connected DVR, which enables you to get a convenient remote access to the surveillance system.

The Guarding Vision can be enabled via operation on SADP software, GUI and Web browser.

## Steps

1. Go to System > Network > Advanced > Platform Access.
2. Check **Enable** and a **Service Terms** window will pop up. Create your verification code, check to agree to the service terms and click **OK**.
3. (Optional) Check **Custom** and enter the server address as needed. The default server address is dev.guardingvision.com.
4. (Optional) Check **Enable Stream Encryption** and verification code will be required for remote access and live view.
5. Click **Apply**. After configuration, you can access and manage the DVR by your mobile phone or by the website ([www.guardingvision.com](http://www.guardingvision.com)).

Email Platform Access More Settings

Access Type Guarding Vision

Enable

Server Addr... litedev.sgp.guardingvisic  Custom

Enable Stream ...

Verification Code abc111111

Status Online

Guarding Vision ... Linked Unbind

Scan the QR code via the Guarding Vision app application to add the device.

Scan the QR code to download the smartphone app.

Apply

Figure 2-2 Guarding Vision Settings

## 2.2 Add Device

### 2.2.1 Add Device by Scanning QR Code

#### Steps

1. Tap a site on the site list to enter the site details page.
2. Tap **Add Device** to enter the Add Device page.
3. Scan the QR code on the device.

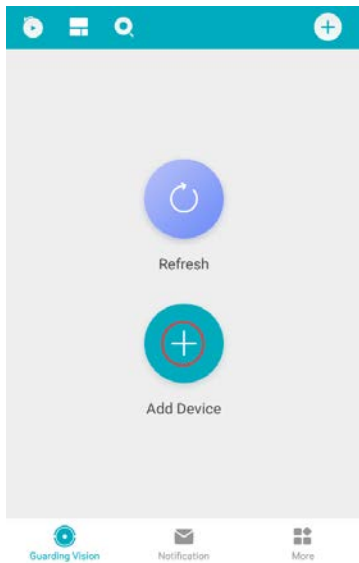


Figure 2-3 Add device



Figure 2-4 QR code1

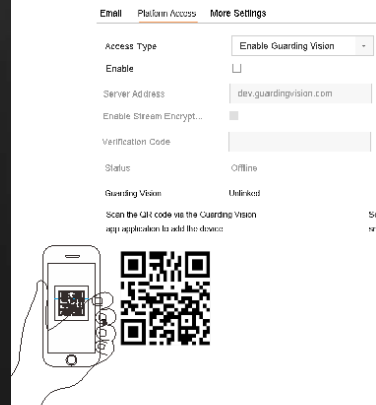


Figure 2-5 QR code2

4. The added device will then be listed under the **“Adding Completed”**. And then click **“Next”**.
5. Click **Edit Alias**, you can change the DVR’s display name.
6. Click **Save**. it will go back to the Device list. DVR should be showing under **My Device**.

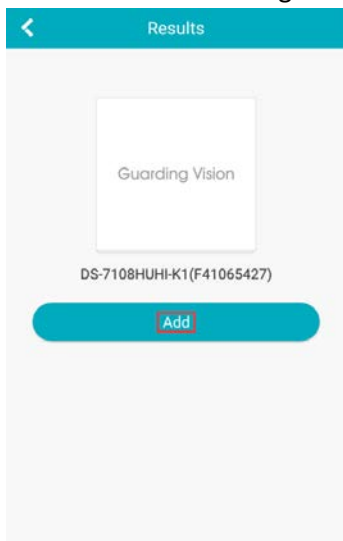


Figure 2-6

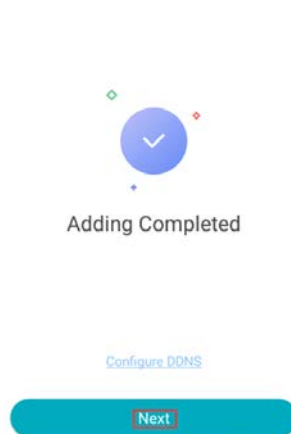


Figure 2-7

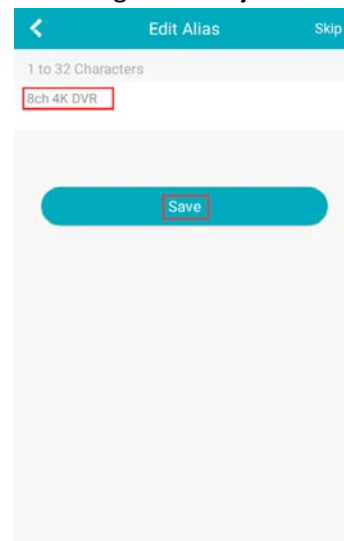


Figure 2-8

7. Click your DVR, and a small live view window will show on the bottom right-hand side.
8. Click the window to change it into full screen for live viewing.

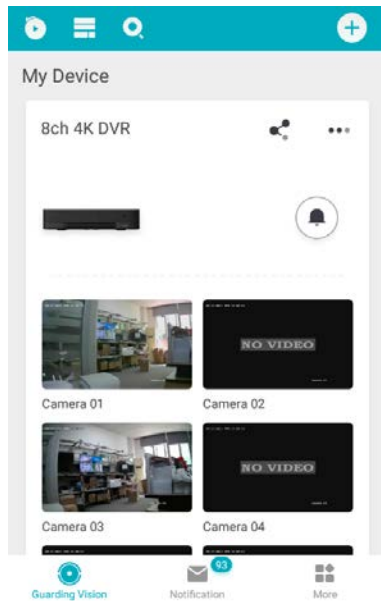


Figure 2-9

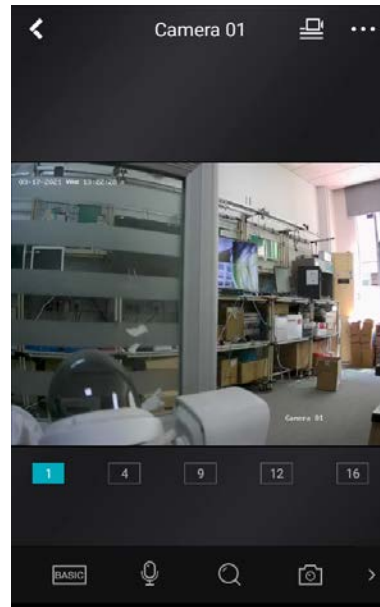


Figure 2-10

**Note:** The device/DVR can only be added to one account.

## 2.3 Delete Device

### Steps

1. Tap the device and then tap **...** → **Delete Device** to delete the device.
2. Click **Delete Device** and then click **OK**, The device will be deleted from your account.

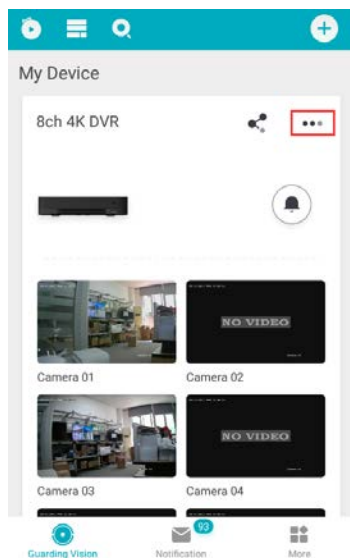


Figure 2-11

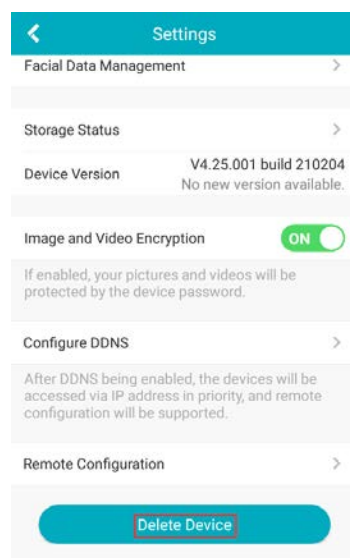


Figure 2-12

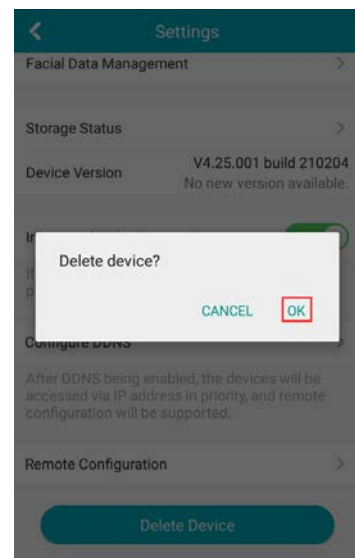


Figure 2-13

**Note:** Deleting device is not supported if the site is authorized.

Please refer to the help file *Guarding Vision Mobile Client* the device to Guarding Vision and more operation instructions. (Click More-Help)